

Teleskopcylinder

Teleskopcylinder med kugleende
VT166/6/2220




Slaglængde: 2220 mm

Tipevne: 18000 kg

Trin: 6

L min. 573 +
slaglængde 2220

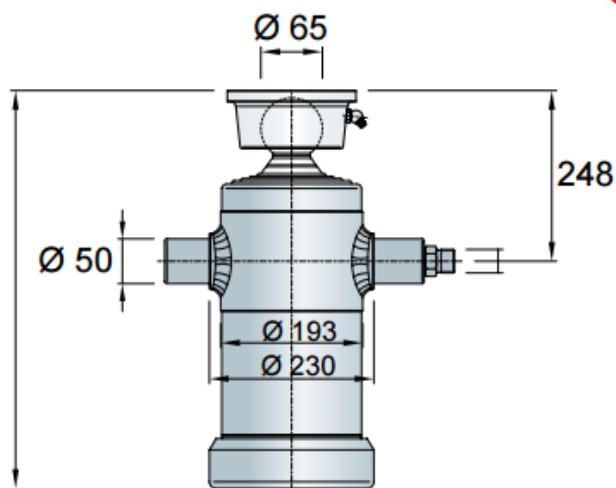


Alle mål i mm.

Portata in kg. per ogni singola sfilata - Thrust in kg. for single extension -
Charge en kg. pour chaque expansion

Pressione di esercizio 180 Bar con punte massime di 180 Bar.

Rated pressure 180 Bar reachig maximum point of 180 Bar.

Pression d'utilisation 180 Bar, pression maximum 180 Bar.

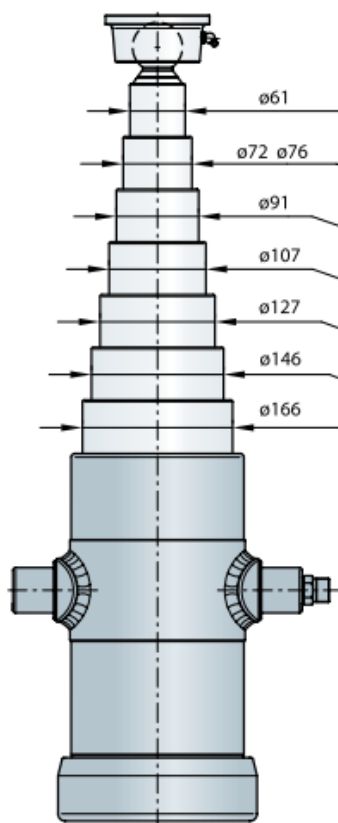

Press. Bar	ø166	ø146	ø127	ø107	ø91	ø76	ø72	ø61
100	21.630	16.730	12.660	8.980	6.500	4.530	4.070	2920
125	27.040	20.910	15.820	11.230	8.120	5.660	5.080	3.650
160	34.610	26.770	20.250	14.370	10.400	7.250	6.510	4.670
180	38.930	30.110	22.790	16.170	11.700	8.160	7.320	5.250

De aktuelle data i skemaet er markeret med gult.