

Teleskopcylinder


Teleskopcylinder med hul i stok
VT91/3/600H



Slaglængde: 600 mm

Tipevne: 5000 kg

Trin: 3

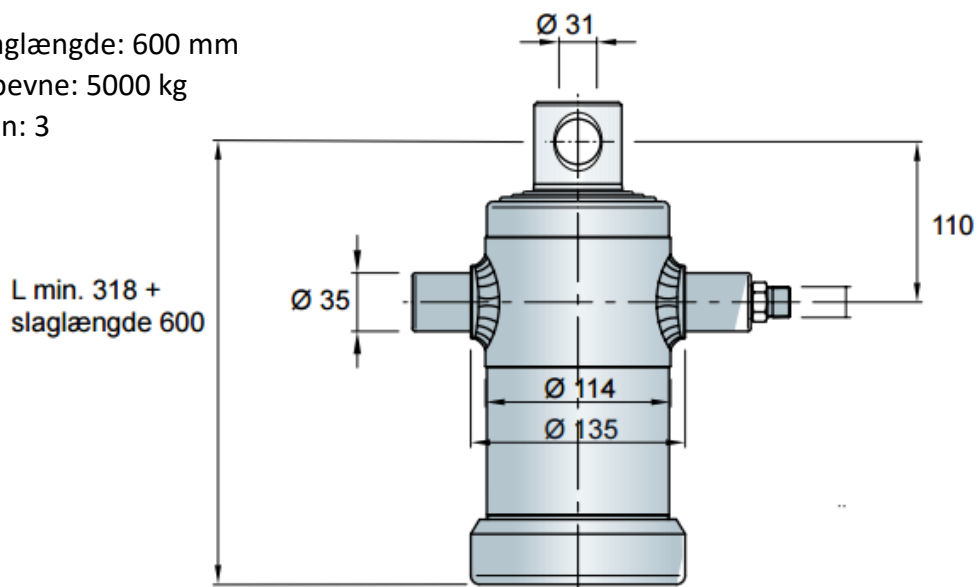


Alle mål i mm.

Portata in kg. per ogni singola sfilata - Thrust in kg. for single extension -
Charge en kg. pour chaque expansion

Pressione di esercizio **180 Bar** con punte massime di 180 Bar.

Rated pressure **180 Bar** reachig maximum point of 180 Bar.

Pression d'utilisation **180 Bar**, pression maximum 180 Bar.

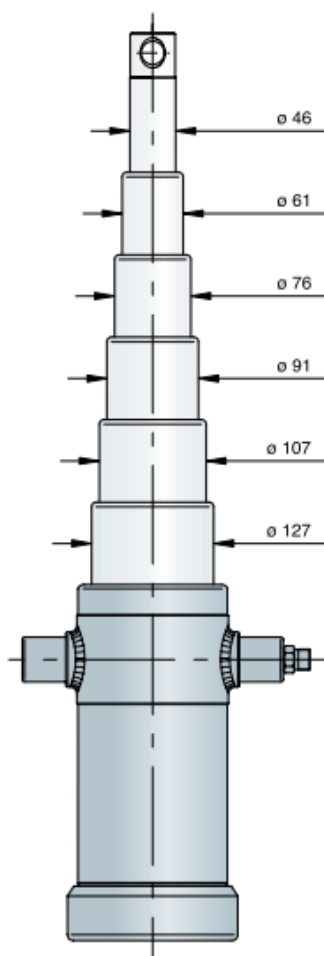

Press. Bar	Ø 127	Ø 107	Ø 91	Ø 76	Ø 61	Ø 46
100	12,660	8,980	6,500	4,530	2,920	1,660
125	15,820	11,230	8,120	5,660	3,650	2,070
160	20,250	14,370	10,400	7,250	4,670	2,650
180	22,790	16,170	11,700	8,160	5,250	2,980

De aktuelle data i skemaet er markeret med gult.