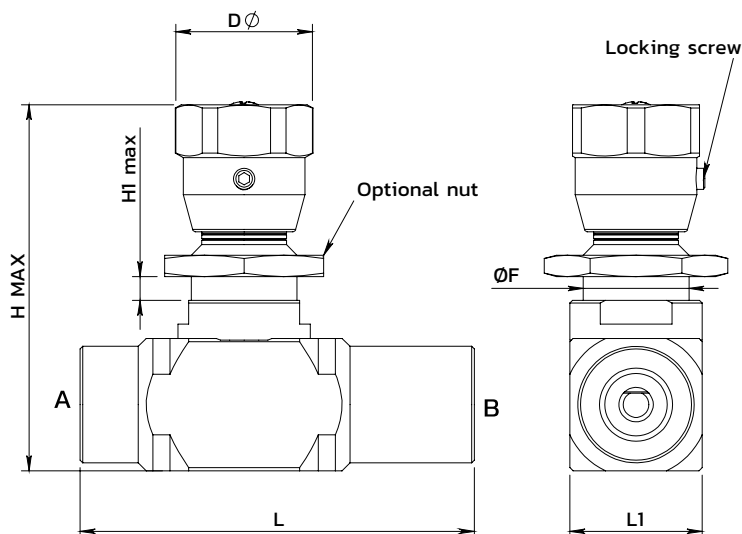


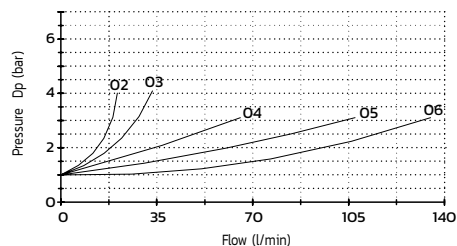


Unidirectional flow regulator
Regolatore di flusso unidirezionale

SPECIFICATIONS / SPECIFICHE

Fluid viscosity / Viscosità Fluido	ISO 3448
Filtration / Classe di contaminazione	ISO 4406
Fluid temperature / Temperatura fluido	-20°C +90°C
Ambient temperature / Temperatura ambiente	-20°C +50°C
External surfaces / Superfici esterne	Zinc plated

PERFORMANCE A to B / PRESTAZIONI

 Oil viscosity 24 mm²/s (3.5 °E) - Temperature 50°C

ORDERING CODE / CODICE ORDINAZIONE

21	E	02	B01	3	0	**	0
----	---	----	-----	---	---	----	---



Ports size	
02	1/4 BSPP
03	3/8 BSPP
04	1/2 BSPP
05	3/4 BSPP
06	1" BSPP

Standard code	Thread A-B	ØF	L	L1	ØD	H	H1 Max	Weight (kg)	Max. Pressure (bar)	Max Flow (l/m)
21E02B0130020	1/4	M20x1.5	73	25	26	75	4.5	0.4	350	15
21E02B0130030	3/8	M20x1.5	83	30	26	83	4.5	0.4	350	30
21E02B0130040	1/2	M20x1.5	94	30	26	90	4.5	0.6	350	50
21E02B0130050	3/4	M30x1.5	110	40	39.5	125	4.5	1.3	320	80
21E02B0130060	1"	M35x1.5	135	50	39.5	136	4.5	2.0	300	150

* On request versions: Please, contact our customer service / Versioni su richiesta: Per cortesia contattare il ns. servizio clienti.