
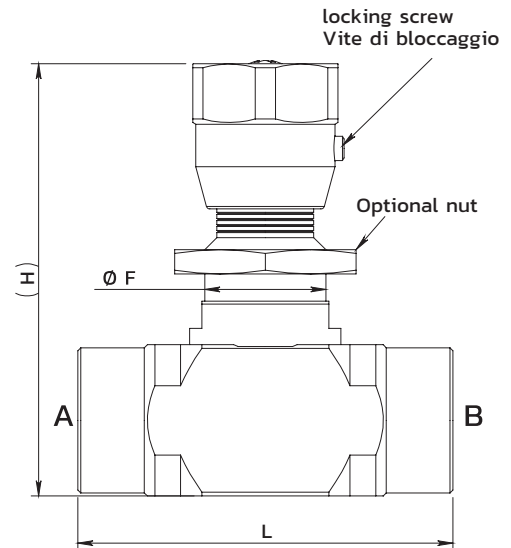
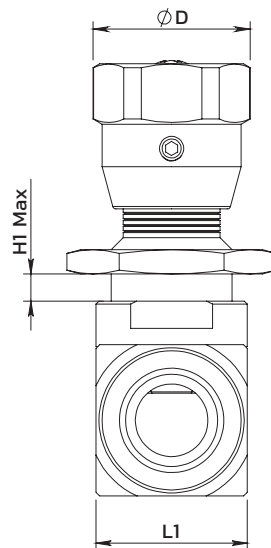



FCV-2-90°

TAON
Hydraulik Komponenter

Bidirectional needle valve
Regolatore di flusso bidirezionale




SPECIFICATIONS / SPECIFICHE

Fluid viscosity / Viscosità Fluido	ISO 3448
Filtration / Classe di contaminazione	ISO 4406
Fluid temperature / Temperatura fluido	-20°C +90°C
Ambient temperature / Temperatura ambiente	-20°C +50°C
External surfaces / Superfici esterne	Zinc plated

PERFORMANCE / PRESTAZIONI

Oil viscosity 24 mm²/s (3.5 °E) - Temperature 50°C

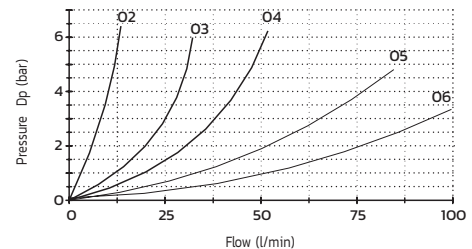

ORDERING CODE / CODICE ORDINAZIONE

21	F	02	B01	3	0	**	0
----	---	----	-----	---	---	----	---



Ports size	
02	1/4 BSPP
03	3/8 BSPP
04	1/2 BSPP
05	3/4 BSPP
06	1" BSPP

Standard code	Thread A-B	ØF	L	L1	ØD	H	H1 Max	Weight (kg)	Max. Pressure (bar)	Max Flow (l/m)
21F02B0130020	1/4	M20x1,5	62	25	26	80	4.5	0.34	350	15
21F02B0130030	3/8	M20x1,5	62	25	26	80	4.5	0.33	350	30
21F02B0130040	1/2	M20x1,5	62	30	26	88	4.5	0.45	350	50
21F02B0130050	3/4	M30x1,5	91	40	42	116	4.5	1.20	320	90
21F02B0130060	1"	M35X1.5	102	45	38	114	4.5	1.5	400	150

* On request versions: Please, contact our customer service / Versioni su richiesta: Per cortesia contattare il ns. servizio clienti.