

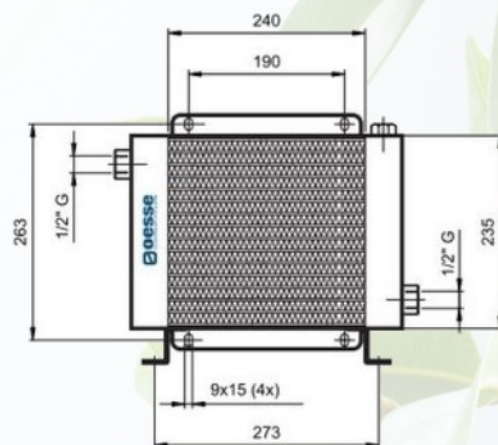


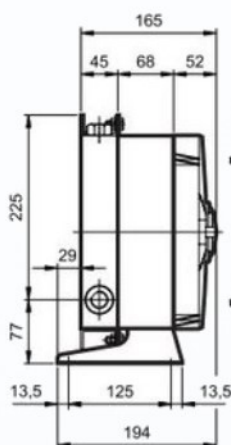

HY 016


12
Volt

24
Volt

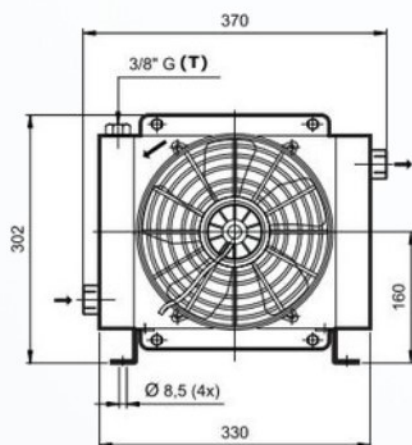


Dati Tecnici / Technical information / Technische Daten

Type	Oil flow	Capacity	Weight	Voltage	Current	Power	Fan Ø	Air flow	Noise Level
	l/min	l	kg	V	A	W	mm	m³/h	dB(A)
90006	20 - 80	1,6	6	12	7,6	91,2	225	650	68
90007	20 - 80	1,6	6	24	4	96	225	830	68

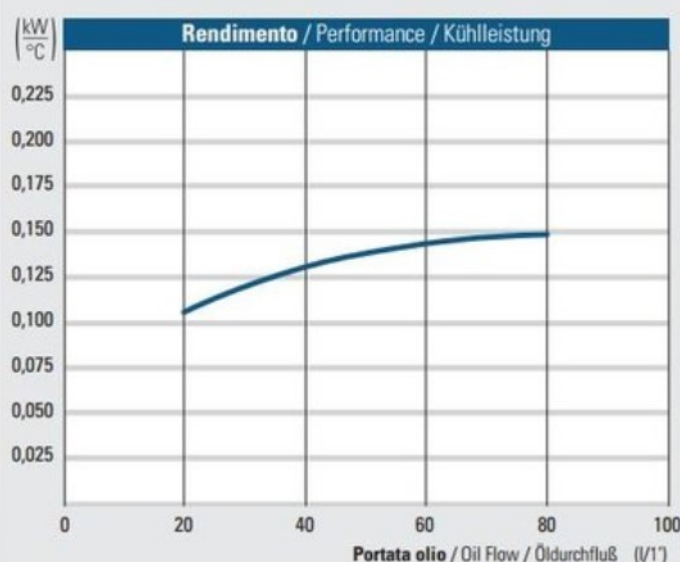

1 kW = 860 Kcal/h - 1 kW = 635 HP

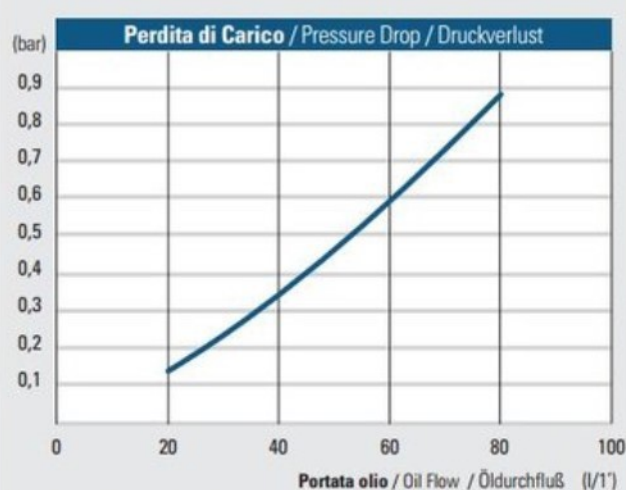

Correzione viscosità - Viscosity correction - Viskositätskorrektur

Olio - Oil - Öl: ISO VG @ 40 °C

22	32	46	68	150
----	----	----	----	-----

Moltiplicare per - Multiply for - Multiplizieren mit:

0,7	0,9	1	1,1	2
-----	-----	---	-----	---

TAON

Hydraulik Komponenter

TAON Hydraulic Components ApS are specialists in hydraulic solutions, components and tool.

TAON Hydraulic Components ApS • +45 24 48 84 80 • info@taon.dk • www.taon.dk

© TAON Hydraulic will always help you find the best solution.