

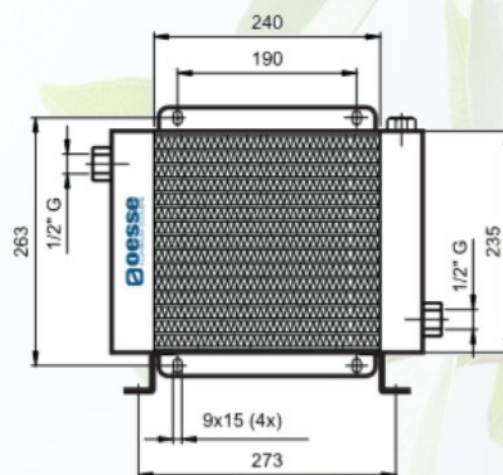


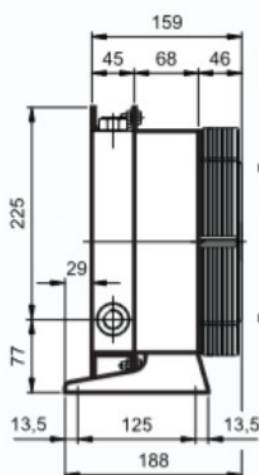


HY 016

230
Volt

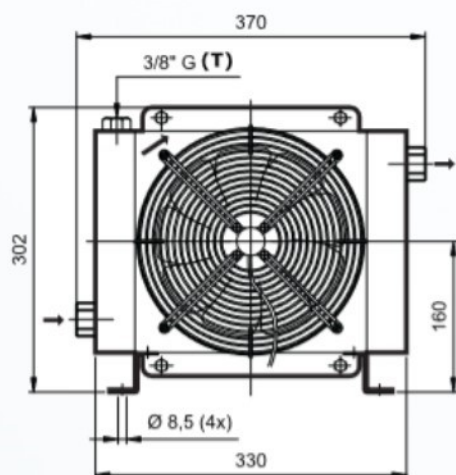


Dati Tecnici / Technical information / Technische Daten

Type	Oil flow	Capacity	Weight	Voltage	Frequency	Current	Power	Fan Ø	Air flow	Noise Level
	l/min	l	kg	V	Hz	A	W	mm	m³/h	dB(A)
90038	20 - 80	1,6	6,6	230	50/60	0,27/0,33	62/76	200	650	65

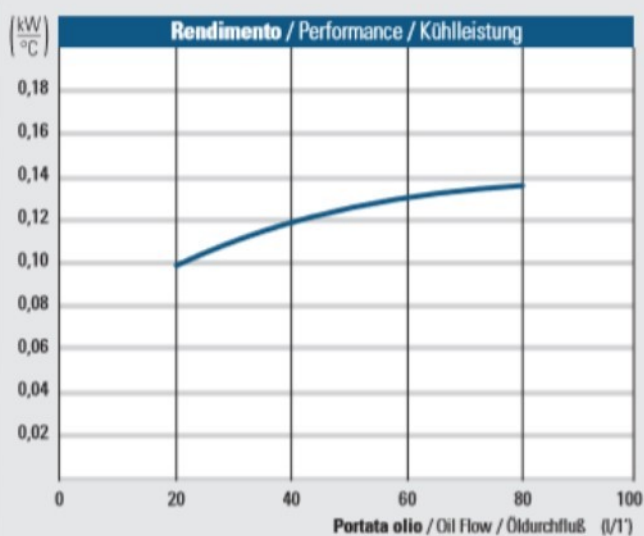

1 kW = 860 Kcal/h - 1 kW = 635 HP

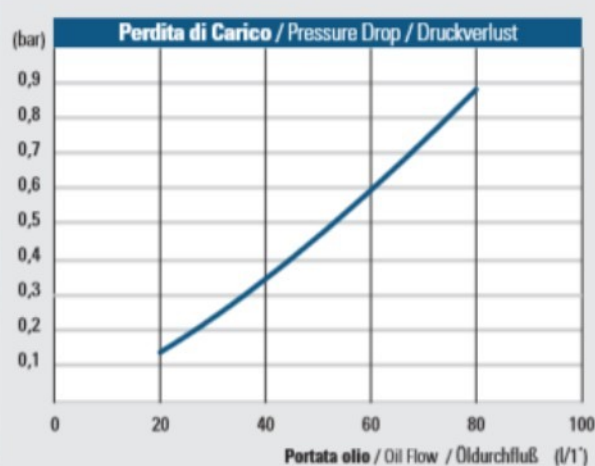

Correzione viscosità - Viscosity correction - Viskositätskorrektur

Oil - Öl - Ö: ISO VG @ 40 °C
 Multiplicare per - Multiply for - Multiplizieren mit: 0,7 0,9 1 1,1 2

TAON

Hydraulik Komponenter

TAON Hydraulic Components ApS are specialists in hydraulic solutions, components and tool.

TAON Hydraulic Components ApS • +45 24 48 84 80 • info@taon.dk • www.taon.dk

© TAON Hydraulic will always help you find the best solution.