





HY 010

230
Volt

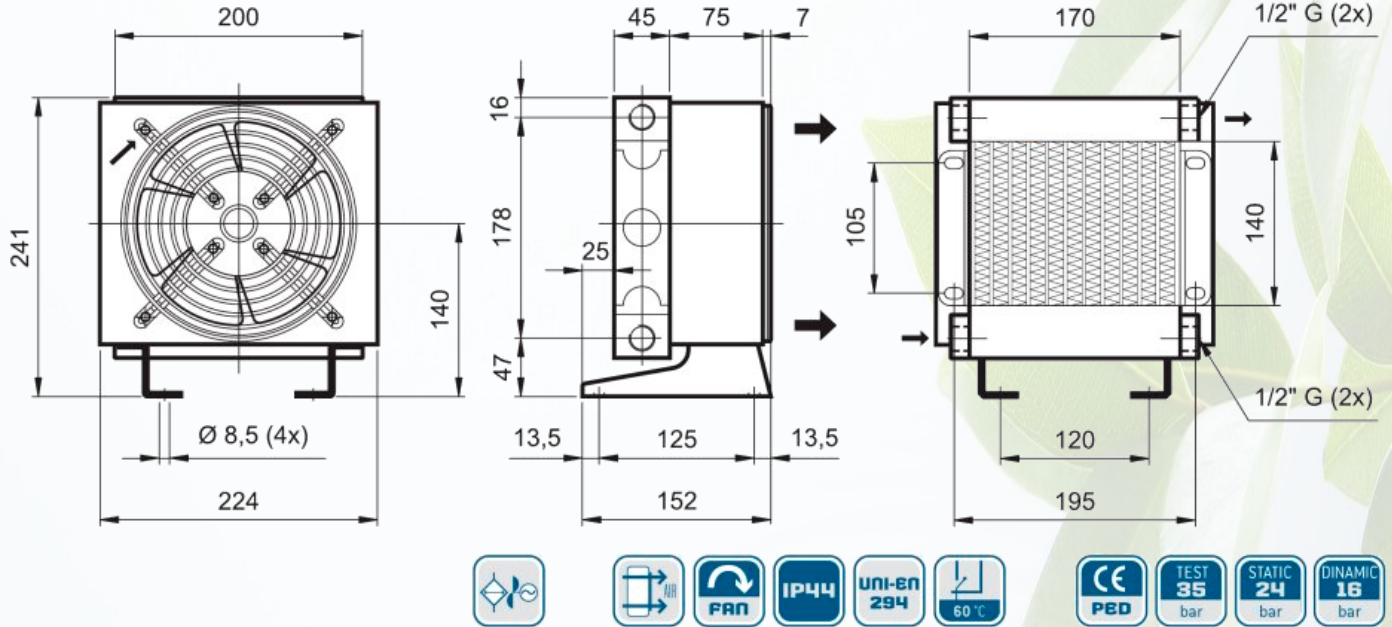


Technical information

Type	Oil flow	Capacity	Weight	Voltage	Frequency	Current	Power	Fan Ø	Air flow	Noise Level
	l/1'	l	kg	V	Hz	A	W	mm	m³/h	dB(A)
90041	10 - 40	0,8	6	230	50/60	0,9	45	175	230	65

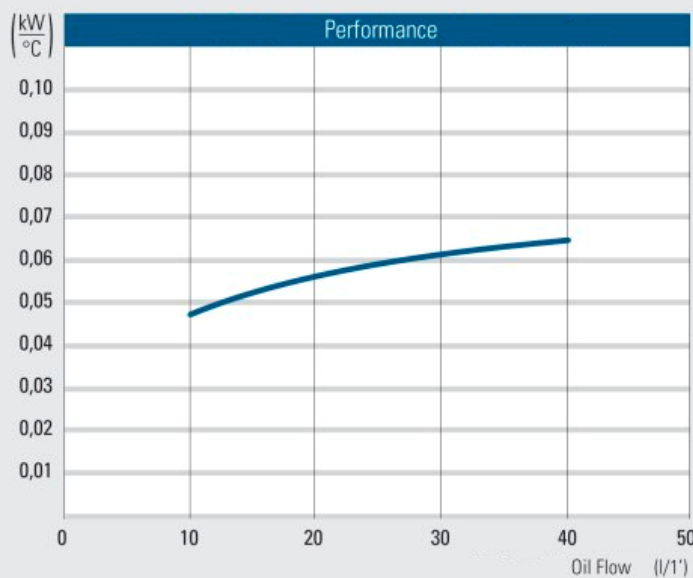

1 kW = 860 Kcal/h - 1 kW = 635 HP

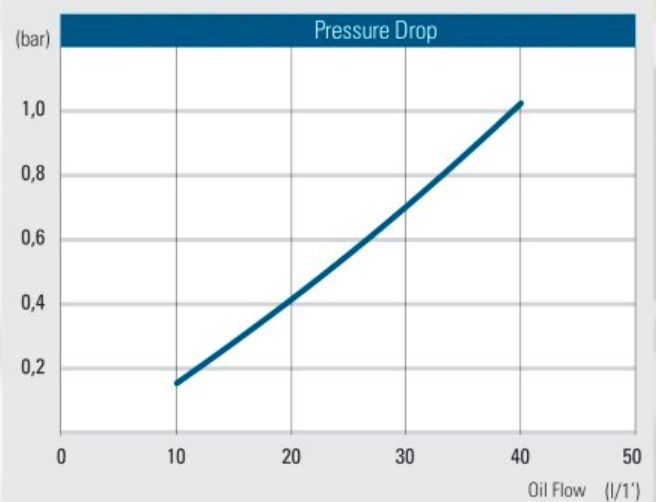

Viscosity correction

Oil : ISO VG @ 40 °C

22 32 **46** 68 150
Multiply for : 0,7 0,9 **1** 1,1 2

TAON

Hydraulik Komponenter

TAON Hydraulic Components ApS are specialists in hydraulic solutions, components and tool.

TAON Hydraulic Components ApS • +45 24 48 84 80 • info@taon.dk • www.taon.dk

© TAON Hydraulic will always help you find the best solution.