
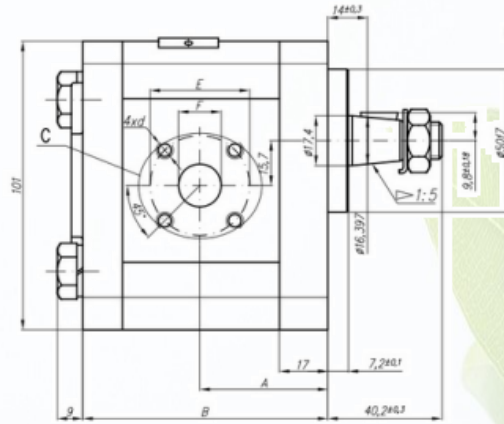


Hydraulic gear pump—Gr. 2

20A(C)..X007

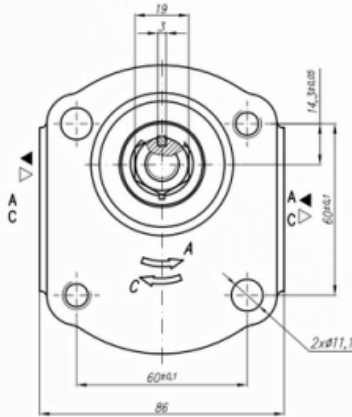

Model	Displacement	Flow		Pressure	Max. Speed	Dimensions								
	cm ³ /rev	@ 1500 rpm. L/ min.	@ max. rpm L/min	pnom bar	n rpm	A mm	B mm	Inlet			Outlet			
								E	F	d	E	F	d	
20A(C)4.5X007	4.5	6.14	14.33	250	3500	37.3	75.1	40	20	M6-6H	35	15	M6-6H	
20A(C)6.3X007	6.3	8.69	20.29	250	3500	38.6	78							
20A(C)7X007	7	9.66	22.54	250	3500	42.5	82.1							
20A(C)8.2X007	8.2	11.32	26.4	250	3500	40.6	78							
20A(C)10X007	10	13.95	32.55	250	3500	45	87							
20A(C)11X007	11	15.76	36.78	250	3500	45	89.1							
20A(C)12X007	12	16.92	39.48	250	3500	45	90.3							
20A(C)14X007	14	19.95	46.55	250	3500	45	93.4							
20A(C)15X007	15	21.6	36	250	2500	45	94.9							
20A(C)16X007	16	23.04	38.4	250	2500	45	96.5							
20A(C)19X007	19	27.36	45.6	200	2500	45	101.5							
20A(C)22X007	22	31.68	42.24	180	2000	52.5	106.5							
20A(C)25X007	25	36	48	160	2000	57.2	111.4							

TAON

Hydraulik Komponenter

TAON Hydraulic Components ApS are specialists in hydraulic solutions, components and tools.

• +45 24 48 84 80 • info@taon.dk • www.taon-hydraulic.com

© TAON Hydraulic will always help you find the best solution.