


Hydraulic gear pump—Gr. 3

Euroflange, 1:8

30A(C)..X146H

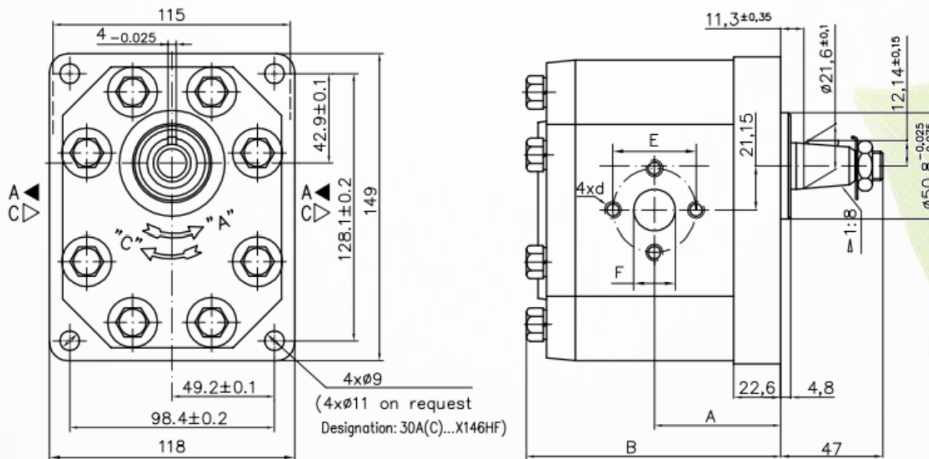

Model	Displacement		Flow		Pressure pnom bar	Max. Speed n rpm	Dimensions							
	cm ³ /rev	@ 1500 rpm. L/min.	@ max. rpm L/min	A mm			B mm	Inlet			Outlet			
									E	d	F	E	d	F
30A(C)20X146H	20	28.2	56.4	250	3000	56.1	116.7	40	M8	19				
30A(C)22.5X146H	22.5	31.7	63.5	250	3000	57.6	119.7							
30A(C)25X146H	25	35.3	70.5	250	3000	58.3	121.1							
30A(C)28X146H	28	39.5	79	250	3000	60.2	124.7							
30A(C)32X146	32	45.1	75.2	250	2500	62	128.3	51	M10	27	40	M8	19	
30A(C)32X146H	32	45.1	90.2	250	3000	66.5	137.3							
30A(C)36X146	36	50.8	84.6	250	2500	63.5	131.4							
30A(C)36X146H	36	51.3	95.8	250	2800	68	140.5							
30A(C)42X146	42	59.9	91.8	230	2300	66.3	137							
30A(C)42X146H	42	59.9	99.8	230	2500	70.8	146.1							
30A(C)46X146H	46	65.6	100.5	230	2300	72.7	149.8							
30A(C)50X146H	50	71.3	99.8	200	2100	74.5	153.4							
30A(C)55X146H	55	78.4	91.4	200	1750	76.7	157.9							
30A(C)60X146H	60	85.5	99.8	180	1750	78.7	162.4							



TAON Hydraulic Components ApS are specialists in hydraulic solutions, components and tools.

• +45 24 48 84 80 • info@taon.dk • www.taon-hydraulic.com

© TAON Hydraulic will always help you find the best solution.